

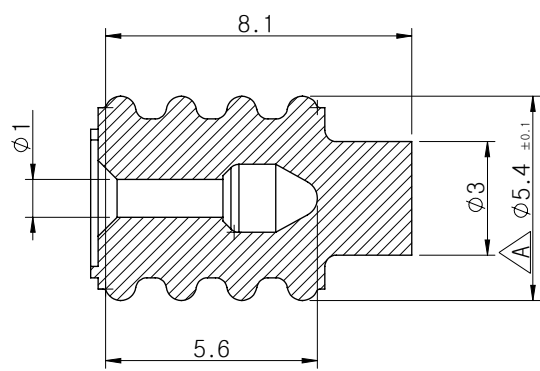


① W/S NMWP-V



SECTION A-A




- 주 기 -



- 1. 사용상 유해한 흠, burr등이 없을 것.
- 2. 지시하지 않은 R은 0.3이하로 할 것.
- 3. MARKING 및 CAV.NO는 당사규정에 준할 것.

△1 4. APTIV Drawing No : 15385785

② RS SEALED PIN

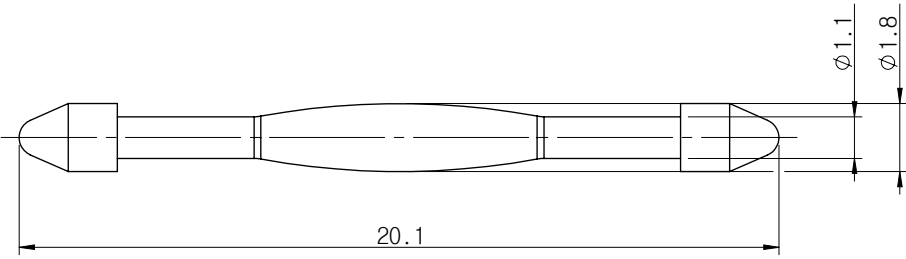

③ S/P NMWP ASSY

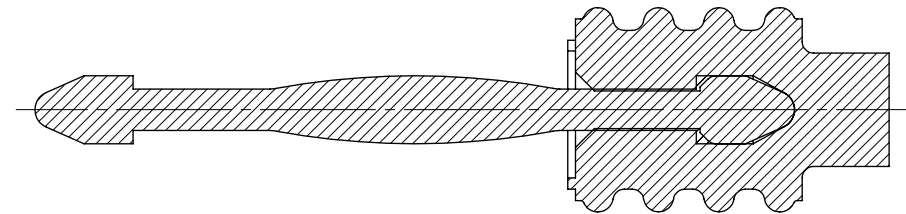

SECTION B-B

GENERAL TOLERANCE							
	10MAX	50MAX	100MAX	150MAX	200MAX	200VR	ANGLE
A	±0.2	±0.3	±0.5	±0.8	±1.0	±1.4	±30'

③	S/P NMWP ASSY	PZ001-15022	15385785	—	—
②	RS SEALED PIN	PZ001-15020	35297100	BLACK	PBT
①	W/S NMWP-V	RS220-05000	35338006	GRAY	SI-RUBBER
NO.	KUM PART NAME	KUM PART No.	APTIV P/No.	COLOR	MATERIAL
	THIRD ANGLE PROJECTION	A	5/1	KNJ	YSR
		TOLERANCE	SCALE	DESIGN	DRAWN
				CHECKED	APPROVED

CJW	21.06.09	-	△ 1	ADDED APTIV P/No.	LDH
CJW	12.04.30	E012-0077	△ A	공차추가(1개소)	YSR
KKL	93.02.24	-	△ -	신 규	SSJ
승인	DATE	NOTE No.	SYM	ALTERATION	담당
DRAWING NAME			S/P NMWP ASSY		
DRAWING No.			PZ001-15022-C01		
● APTIV ●					