



REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
A	PROPOSAL	MAR 29/06	L.CHAN
B	PROPOSAL	OCT 25/19	L.CHAN
C	*ADD A DIMENIOSN 10.02MM*	JUN 29/21	L.CHAN

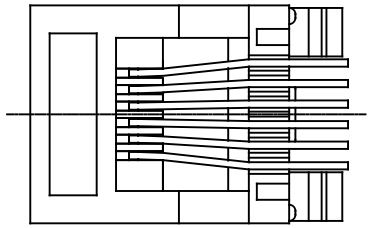

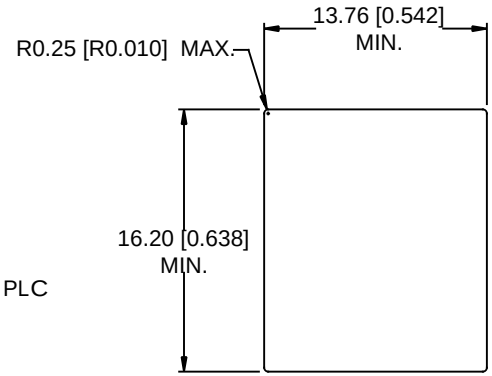

RECOMMENDED PANEL CUTOUT

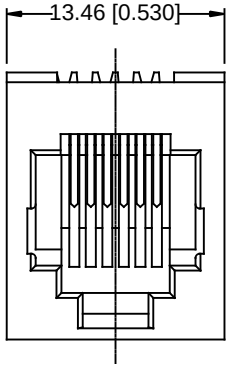

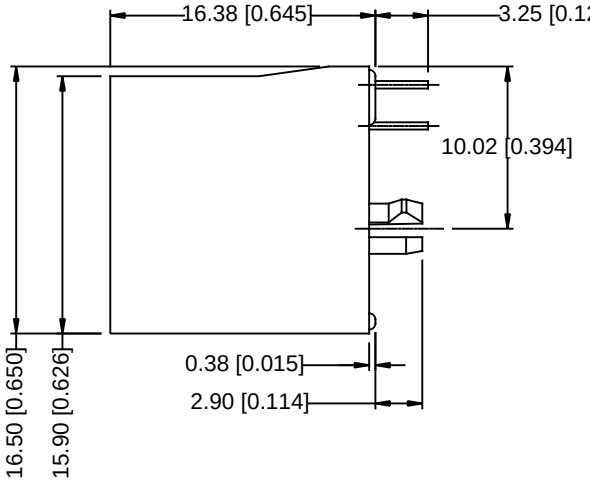


NOTES
HOUSING:ENGINEERING THERMOPLASTIC, FLAMMABILITY RATING UL94V-0,COLOUR: BLACK

CONTACTS:PHOSPHOR BRONZE.
PLATING: GOLD PLATING (REFER TO PART NUMBER FOR THICKNESS ON MATING SURFACES)
50u"[1.27 MICRONS] MIN. NICKEL UNDERPLATE.
100u"[2.54 MICRONS] MIN. MATTE TIN ON CONTACT TAILS.

2. RECOMMEND SOLDER PROCESS
WAVE SOLDER ,PEAK TEMPERATURE 260° FOR 5~8 SECOND

AMPHENOL PART NUMBER:RJE08-166-0X10

GOLD PLATING
0=GOLD FLASH
1=6u" GOLD
2=15u" GOLD
3=30u" GOLD
4=50u" GOLD

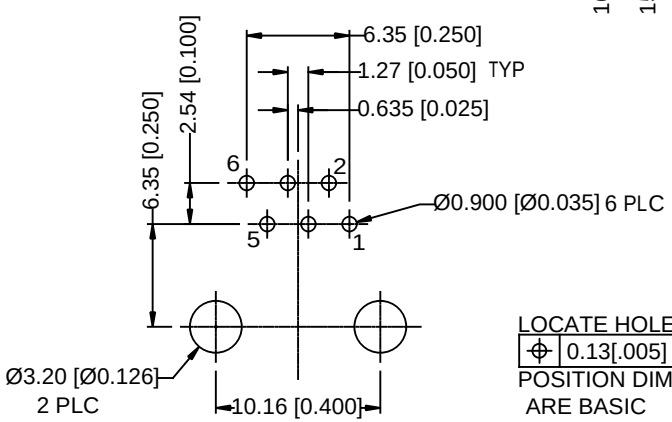

LOCATE HOLES
⌖ 0.13[.005]
POSITION DIMENSIONS ARE BASIC

RECOMMENDED P.C.B. LAYOUT
(COMPONENT SIDE OF BOARD)
TOLERANCE: ±0.05[.002]

UNLESS SPECIFIED OTHERWISE	DRAWN PAULW	MAR29/06	Amphenol Canada Corp. Commercial Products
PRIMARY UNITS MILLIMETERS	CHECKED CHIGOW	MAR29/06	
SECONDARY INCHES	M.E. APP'D		RJE08 MODULAR JACK, SINGLE PORT, 6 POSITION, 6 CONTACTS, NO SHIELD, WITHOUT FLANGE–RoHS COMPLIANT
REFERENCE IN PARENTHESES	Q.A. APP'D		
GENERAL TOLERANCES	DWG APP'D		
1 DECIMAL PLACE ±0.30	ENG. REL. NO.		DWG NO. RJE08–166–0X10 REV C
2 DECIMAL PLACES ±0.25	REF.		
3 DECIMAL PLACES ±0.20	THIRD ANGLE PROJECTION	DO NOT SCALE DRAWING	CODE ID NO. 03554 | DWG SIZE X | SCALE XX:1 | SHEET 1 OF 1
ANGULAR DEGREES ±1.0°			

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.